

1x4 HDMI Splitter with 3D and 4Kx2K

User Manual

Ver. 1.00

**All brand names and trademarks are properties of their
respective owners.**

Contents:

Chapter 1: Introduction	3
1.1 Features.....	3
1.2 Package Contents.....	3
Chapter 2: Getting Started	4
2.1 Hardware Layout	4
2.2 Hardware Installation	6

Chapter 1: Introduction

1.1 Features

- One HDMI input, four HDMI outputs
- HDMI 1.4 compliant
- HDCP 1.4 compliant
- Supports signal rate up to 3.4Gbps
- Supports 1080p and up to 4Kx2K PC resolution
- Supports HDMI Deep Color & full 3D
- Supports Auto EDID
- Front panel LED indicators
- Easy installation
- Meta case

1.2 Package Contents

- 1 x HDMI Splitter with 3D and 4Kx2K
- 1 x Power Adapter
- 1 x User Manual

Chapter 2: Getting Started

2.1 Hardware Layout



Figure 1: Front Panel Layout

- **Power LED:** This LED indicator will become active when the HDMI splitter is powered on
- **HDMI Input LED:** This LED indicator will become active

when a link with HDMI source device is established

- **HDMI Output Port LED (1-4):** This LED indicator will become active when a valid HDMI display is connected to corresponding HDMI output port

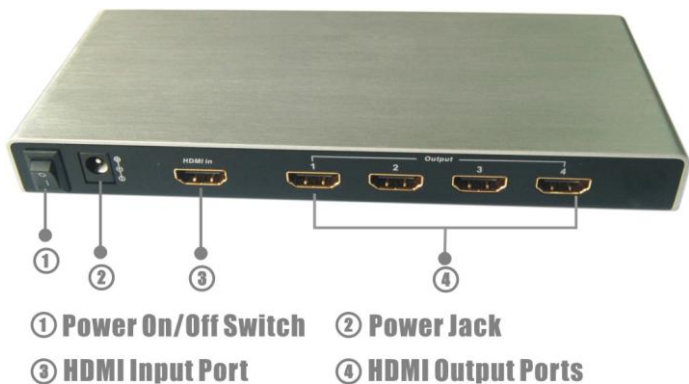


Figure 2: Rear Panel Layout

- **Power On/Off Switch:** Power on/off the HDMI splitter
- **Power Jack:** Connect to the included power adapter

- **HDMI Input Port:** This is the input for the HDMI source device. When a valid source is detected by the HDMI splitter, the link LED will active
- **HDMI Output Port (1-4):** Connect up to 4 HDMI displays to these output ports

2.2 Hardware Installation

1. Connect a HDMI cable to the output port from the HD media source and the input port from HDMI splitter.
2. Connect HDMI cables to the input ports of your HD TVs or displays and the output ports of the HDMI splitter.
3. Plug the power adapter into the power jack of the HDMI splitter.
4. Plug the power adapter into a reliable power outlet.
5. Turn on the power switch, and ensure that the power LED indicator is active.