

USB 5Gbps to HDMI 4K Adapter

User Manual

Ver. 1.00

**All brand names and trademarks are properties of their
respective owners.**

Contents:

Chapter 1: Introduction	3
1.1 Product Introduction	3
1.2 Features	3
1.3 System Requirements	4
1.4 Package Contents	4
Chapter 2: Getting Started	5
2.1 Driver Installation	5
2.1.1 Installation for Windows	5
2.1.2 Installation for Mac OS X	8
2.2 Verifying the installation	10
2.2.1 Verifying for Windows	10
2.2.2 Verifying for Mac OS X	11
2.3 Display Configuration	11

Chapter 1: Introduction

1.1 Product Introduction

This USB 5Gbps Type-C/Type-A to HDMI 4K Adapter connects a 4K TV, monitor, or projector to your computer system. The adapter adds Ultra 4K video support to your computer system through an available USB 5Gbps port. It supports a resolution up to 3840 x 2160. It is Windows and Mac compatible.

1.2 Features

- Highest performance USB graphics solution available. Combines both video and audio over a single USB cable and HDMI cable
- Connect multiple monitors with resolution as high as 3840x2160 (4K) to Windows-based laptops and desktops.
- Connect to Windows PCs via SuperSpeed USB 5Gbps. USB bus

powered (no power adapter required).

- Adapter is backward compatible with USB 2.0, but in most cases performance above 1080P over USB 2.0 will be unsatisfactory.
- Support HDMI display up to 3840x2160@30Hz, 2560x1440, 1920x1080(1080P) and all lower modes will refresh at 60Hz.

1.3 System Requirements

- Windows® 7/8/8.1/10/11; Mac OS X 10.10 or above
- Available USB Type-A or Type-C port

1.4 Package Contents

- 1 x USB 5Gbps to HDMI 4K Adapter
- 1 x User Manual

Chapter 2: Getting Started


2.1 Driver Installation

The following section shows you how to install the USB 5Gbps to HDMI 4K Adapter driver on different operating systems.


Important! Please connect the USB 5Gbps to HDMI 4K Adapter to your PC before the install.

2.1.1 Installation for Windows


1. Please go to the official website to download the driver. Please click “Install Driver”.(<http://www.sunrichtech.com.hk/index.html>)
2. Please click “SMIUSBDisplaySW.exe”

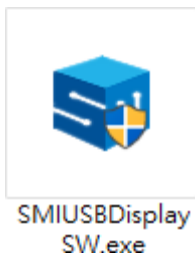

3. Please click **“Install”** to continue.

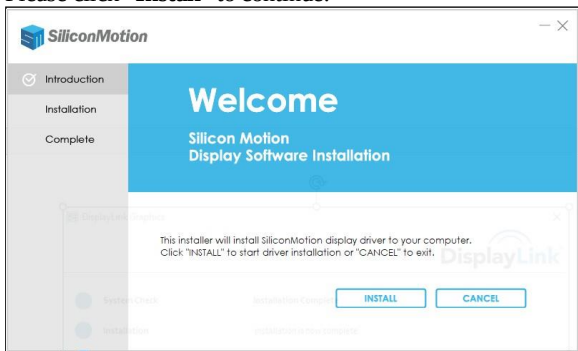


4. Click **“Exit”** to Finish of the driver installation steps.

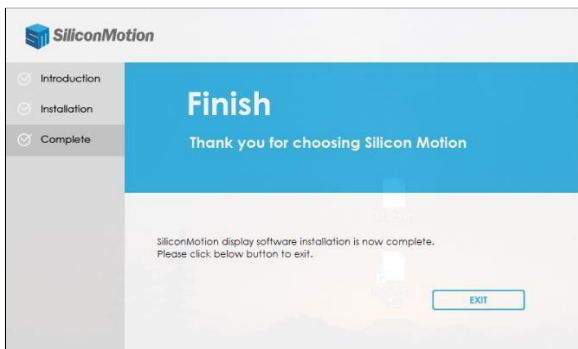


Note: On some machines, you may need to reboot before you can use USB 5Gbps to HDMI 4K Adapter.

2.1.2 Installation for Mac OS X

1. Please go to the official website to download the driver. please click “Install Driver”. (<http://www.sunrichtech.com.hk/index.html>)
2. Double Click “**macOS_InstantView.dmg**” file.

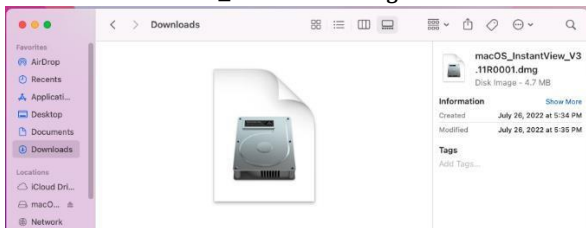

3. Select “**SilicomMotion Software Installer**” to begin installing the SilicomMotion Driver on your Mac.

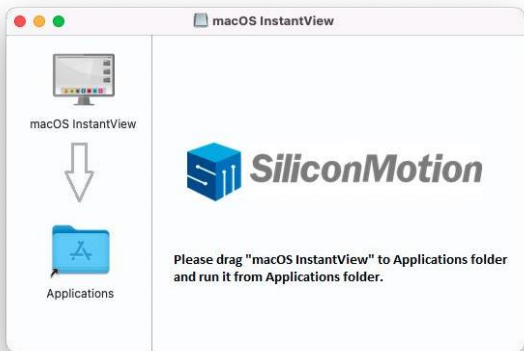

4. Follow the instructions on screen to install the driver. After driver installation is complete, you must restart your computer.


2.2 Verifying the installation

2.2.1 Verifying for Windows

1. Click on the “**Device Manager**” tab in the Windows Control Panel.

Start > Control Panel > Device Manager


2. In the **Display adapters** group, an item named **SMI USB Display** should be displayed.



Note: If there is a question or exclamation mark next to that item, then the driver is not properly installed. Please delete the item, select the **Delete the driver software for this device** option (if provided), unplug the USB 5Gbps to HDMI 4K Adapter from your computer and then repeat the installation steps.

2.2.2 Verifying for Mac OS X

1. Choose **About this Mac** from the Apple menu.
2. Click on **System Report...**
3. In the Contents sidebar select USB from the Hardware section.
4. Scroll the list to reveal the USB 5Gbps to HDMI 4K Adapter information.

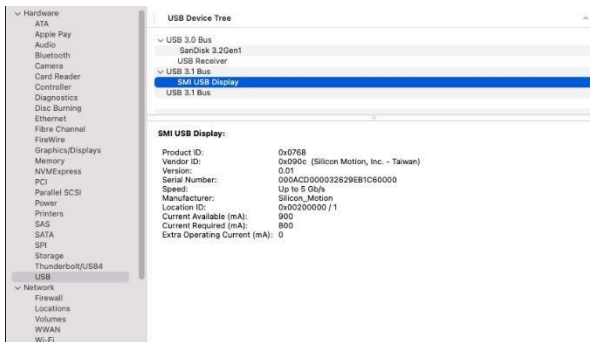

2.3 Display Configuration

When USB 5Gbps to HDMI 4K Adapter is attached, an icon appears in the taskbar. This gives you access to the Instant view manager menu.

To use the Instantview Manager Menu

1. From the taskbar, click the Instantview icon .



2. A menu appears with several options. These are shown and described below.



- **Extend Displays:** Click here to change the mode between mirrored display or extended display
- **Display Settings:** Where settings can be adjusted, all settings adjusted here will be saved
- **Disconnect Display:** Turns off the USB 5Gbps to HDMI 4K Adapter
- **Display Rotation:** Rotates the Display according to the desired orientation
- **Auto Update:** Check for automatic updates to automatically keep your Instant View software updated
- **Remove Application:** Remove all installed applications